


SMA Service module for MidiStar FLASH-4 and FLASH-8

Part number 2320

Analogue service module

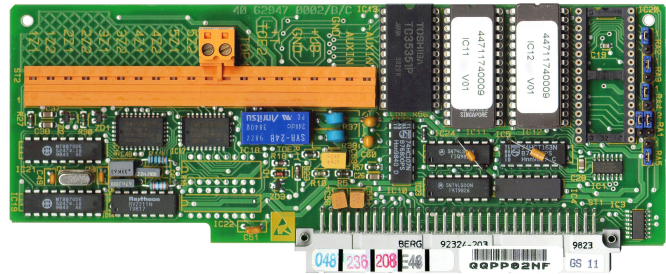

The SMA allows the user of the FLASH-4 or FLASH-8 individual voice announcements stored in programmable EPROM and an audio input for music on hold.

Technical notes

Dimensions packaged : 215 x 110 x 40 mm		Weight: max. 0,13 kg
Spring terminals 1Z1 / 1Z2 ... 6Z1 / 6Z2		TOE1 / TOE2
Application	Optocouple outputs	Relais output
Connector	2-wire, plugable screw clamp	2-wire, plugable screw clamp
Breaking capacity	Max. 24V = / 50mA	Max. 90V = / 1 A
Power supply +T / GND		+UB / GND
Application	Switched power supply	Permanent power supply
Connector	2-wire, plugable screw clamp	2-wire, plugable screw clamp
Input impedance	24V = / 75 mA (+T) for door phone	24V = / 75 mA (+UB)
Input AUX IN / -AUX IN		
Application	Audio input for music on hold	
Connector	2-wire, plugable screw clamp	
Input impedance	47 kΩ / Level 770 mV	