


TSA-6 Extension card for MidiStar FLASH-4 and FLASH-8

Part number 2330

The analogue 6-port subscriber card
with increased overload protection

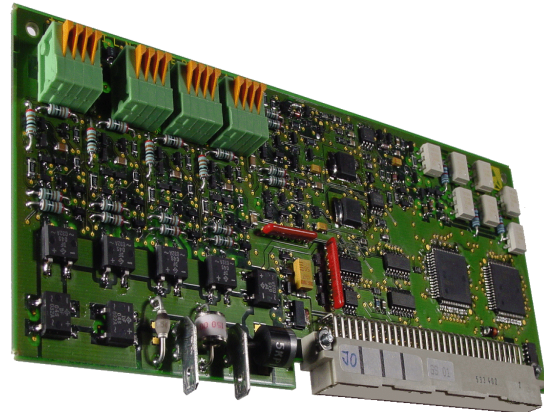

The TSA-6 expands your FLASH-4 or FLASH-8 with an additional 6 analogue subscribers, an external audio input for music on hold or voice announcement and one port for a door station.¹

The connection of the doorstation 'TorStar' is possible on each analogue port.

¹ in preparation

Highlights

- 6 analogue ports for telephone sets with DTMF-signalling
- 2 ports with increased range
- Overload protection for each analogue port
- 2 ports for external subscribers with increased overload protection
- Connection of the doorstation TorStar is possible on each of the 6 analogue ports

Technical notes

| Dimensions packaged: 215 x 110 x 40 mm | | Weight: max. 0,13 kg | | |
|--|--|---|-------------------------------------|-----------------------------------|
| Subscriber | 1, 2 | 3, 4, 5, 6 | 7 | 8 |
| Application | TN-analogue, symmetric | TN-analogue, symmetric | Prepared for selected door stations | Prepared for external audio input |
| Connector | 2-wire / clamp terminals | 2-wire / clamp terminals | | |
| Range | 2 x 400 Ω Max. 1800m - 0,4mmØ Max. 3800m - 0,6mmØ Max. 7350m - 0,8mmØ | 2 x 50 Ω Max. 350m - 0,4mmØ Max. 750m - 0,6mmØ Max. 1450m - 0,8mmØ | | |
| Overload protection | ± 4 kV 1,2/50µs und 10/700µs sym., asym. | ± 4 kV 1,2/50µs und 10/700µs sym., asym. | | |

Technical Requirements: see TSA6-card_03-2004_TR-eng